


Customized

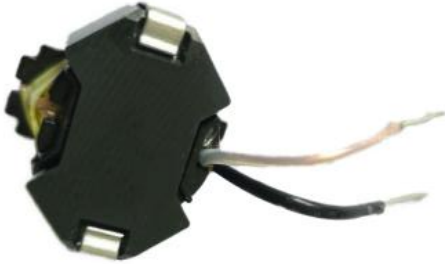

RoHS


产品概要 Outline

- 铁氧体铁心金属化使其具有优异的抗冲击性能和无损伤耐久性。
Metallization on ferrite core results in excellent shock resistance and damage-free durability.
- 闭路磁路设计减少了漏磁和电磁干扰(EMI)。
Closed magnetic circuit design reduces leakage flux and Electro Magnetic Interference (EMI).
- 铁基金属材料芯提供了很大的饱和电流。
Fe base metal material core provides large saturation current.
- 自动化生产确保了产品的高质量和一致性。
Automatic production ensures high quality and consistency.
- 100%无铅, 符合RoHS要求
100% Lead(Pb)-Free and RoHS compliant

品名规格 Part Numbering System

| | | | |
|--------|------------|---|------------|
| RM | 10 | - | 1mH |
| 1 | 2 | | 3 |
| 品名 | 尺寸 | | 电感值 |
| SERIES | DIMENSIONS | | INDUCTANCE |

外观尺寸 Appearance and Dimensions (Unit:mm)

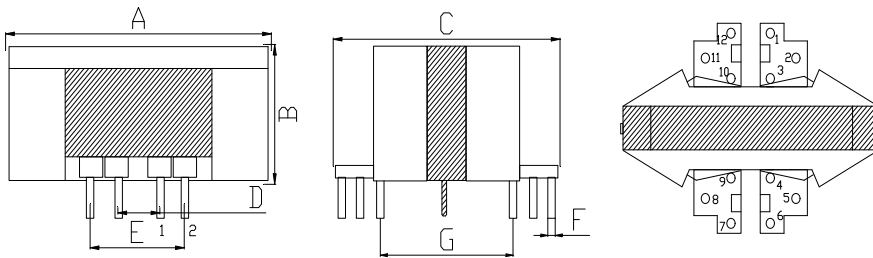

| TYPE | A | B | C | D | E | F | G |
|------|---------|---------|---------|---------|----------|---------|----------|
| RM8 | 25.0Max | 19.0Max | 25.0Max | 3.5±0.3 | 7.0±0.3 | 0.6±0.1 | 14.4±0.5 |
| RM10 | 29.5Max | 20.0Max | 28.5Max | 3.6±0.3 | 7.2±0.3 | 0.6±0.1 | 18.0±0.5 |
| RM12 | 39.5Max | 25.5Max | 39.5Max | 3.6±0.3 | 10.6±0.3 | 0.8±0.1 | 21.6±0.5 |
| RM14 | 43.5Max | 29.5Max | 43.5Max | 7.2±0.3 | 14.3±0.3 | 0.8±0.1 | 25.2±0.5 |